






QSTICK USER GUIDE



SYMBOL	DESCRIPTION
HDMI*	HDMI Connector
Power LED	Power LED-blue
MicroSD*	MicroSD* memory card slot
Security	Security Cable Opening
	USB 3.0 Port
	USB 2.0 Port
	Power Connector
	Power Button

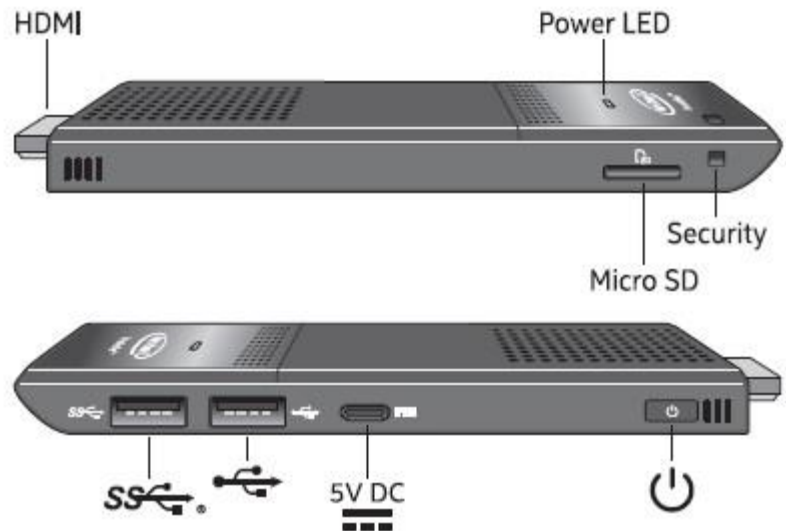

First, you will want to unwrap all materials and remove the safety cap from the HDMI connector. After all materials are out, connect the HDMI of the QStick™ to the Monitors/Kiosks QHDMI adapter.

Next, take the power adapter of the chosen device and attach it to the QSticks power connector.

Before you complete attaching the USB port, you must first set up your USB multi-adapter which is included in the package. Take the Anker USB to Ethernet hub adapter, and attach your Ethernet cable to the adapter.



Then, proceed to connect the USB end of the adapter to the QSticks USB port.



Once all materials are in place, begin to turn on your monitors/kiosks screen and wait for it to load.








The screen is completely loaded once the QLess login page is visible. Proceed to enter your QLess username and password.

Open the backside of the remote and remove the USB connector. Place the USB connector into the USB multi-adapter.



Next, you'll need to put two AA batteries in the remote. The limited distance between the remotes wireless receiver and the remote is 10 meters.



SYMBOL	DESCRIPTION
	Power Button
	Redo/Undo Button
	Home Button/ Main Screen
	Controlling the Computers Cursor
	Menu
	Lower Volume
	Increase Volume